

CIM15-Clip 15 x 32 clip, no reset Part number 99778805

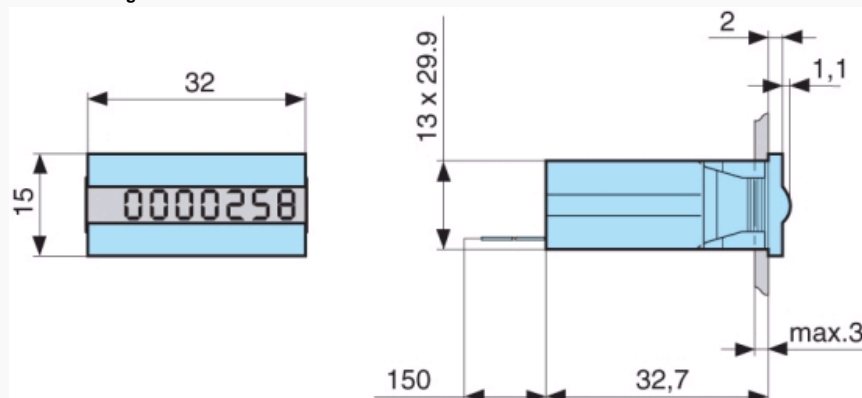

- 7 digits, height of digits 4 mm
- Without manual reset
- White digits on a black background
- Compact size
- Built-in fixing clip
- IP65 (panel only)

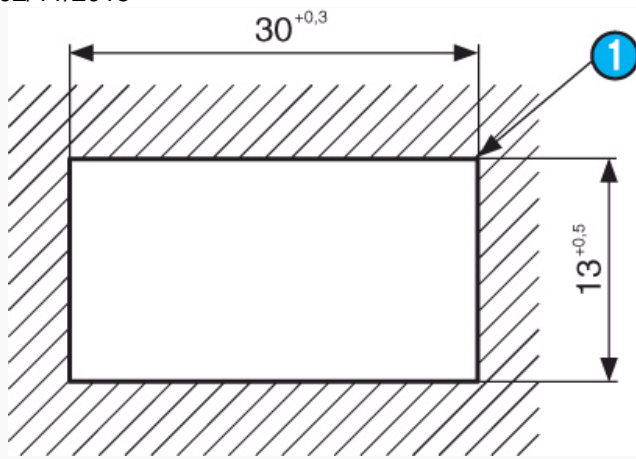
Part numbers

| Type | Operating frequency (Hz) | Voltages |
|---------------------------------|--------------------------|----------|
| 99778805 15 x 32 clip, no reset | VDC | 5 VDC |

Specifications

| | |
|--|--|
| Counting capacity | 9,999,999 |
| Height digits (mm) | 4 |
| Max. count rate | VAC → 10 impulses/s VDC → 10 impulses/s (except for 99778810 : up to 25 impulses/s) |
| Min. count rate | VAC → 50 ms VDC → 50 ms |
| Min pause time between 2 pulses | VAC → 50 ms VDC → 50 ms |
| Max. pulse length (count coil) | Unlimited |
| Voltage variation | VDC : ± -10 % VAC : ± -10 % |
| Consumption | VAC : 800 mVA VDC : 50 mW |
| Mechanical life count function (operations) | > 50 x 10 ⁶ |
| Test voltage according to standard IEC 255-5 | U < 60 V : 500 V U > 60 V : 2 000 V |
| Protection Housing | IP65 panel only |
| Degree of terminal protection | IP00 |
| Environmental protection | Plated or stainless steel components |
| Maintenance | None |
| Operating position | Any |
| Temperature limits use (°C) | -10 → +60 |
| Temperature limits stored (°C) | -40 → +80 |
| Certifications | UL (pending) - CE |
| Connection | Flying leads |
| Mounting | Built-in fixing clip |
| Weight (g) | 20 |

Dimensions (mm)
997787/8 - 7 digits

Dimensions (mm)
Panel cut-out



| N° | Legend |
|----|----------------|
| 1 | R max : 0.5 mm |